



Eveready Battery Company, Inc.
 Checkerboard Square
 St. Louis, MO 63164
 Telephone: 1-800-383-7323
 Internet: www.energizer.com

Engineering Data

ENERGIZER NO. 3-0316I


AAAA

Alkaline 1.5V

No Added Mercury or Cadmium

Dimensions (mm)

Millimeters	Inches
.25	.010
7.21	.284
8.23	.324
39.29	1.547
39.80	1.567

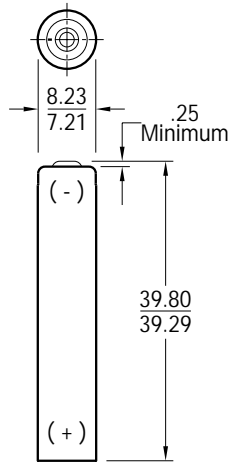

Chemical System: Alkaline-Manganese Dioxide (Zn/MnO₂)

Battery Voltage: 1.5 Volts


Average Weight: 6.2 grams (0.2 oz.)

Volume: 2.1 cubic centimeters (0.1 cubic inch)


Average Service Capacity (to 0.8 Volt / cell): 595 mAh
 (Rated capacity at 25 mA continuous drain)

Jacket: Plastic Shrinkhose


TEMPERATURE EFFECTS
 Typical Service to 0.8 volts

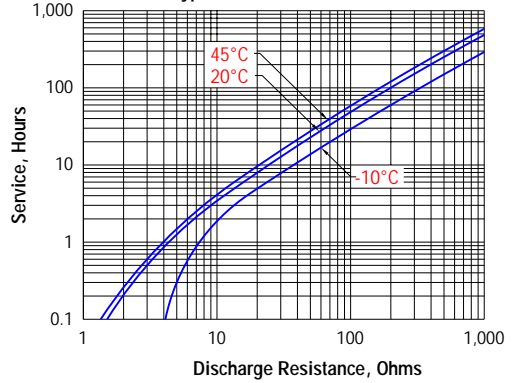


CONSTANT RESISTANCE PERFORMANCE
 Typical Service

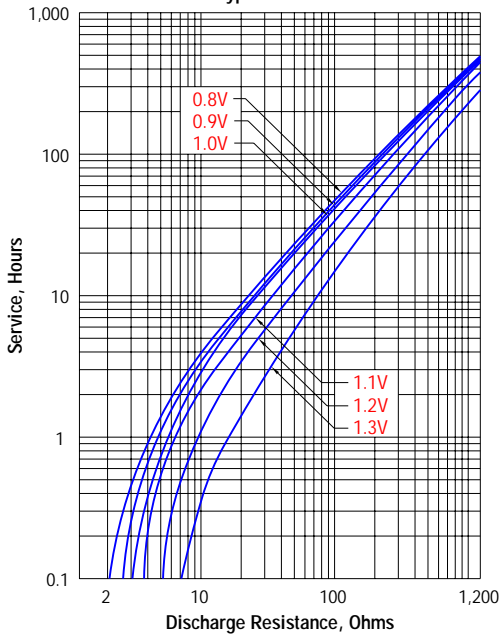




CONSTANT CURRENT PERFORMANCE
 Typical Service

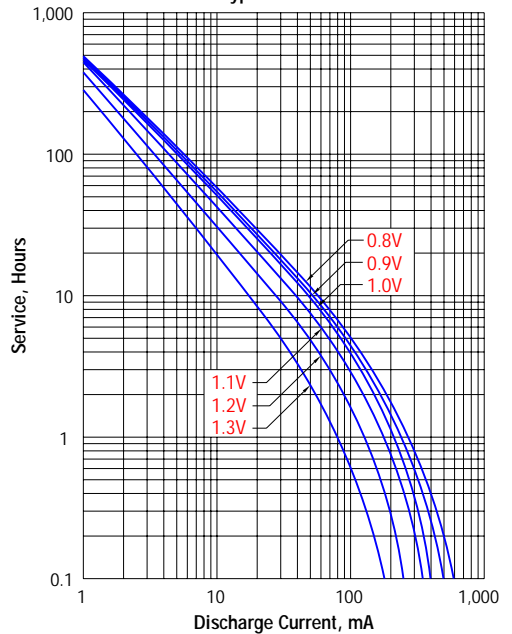

ENERGIZER NO. 3-0316I

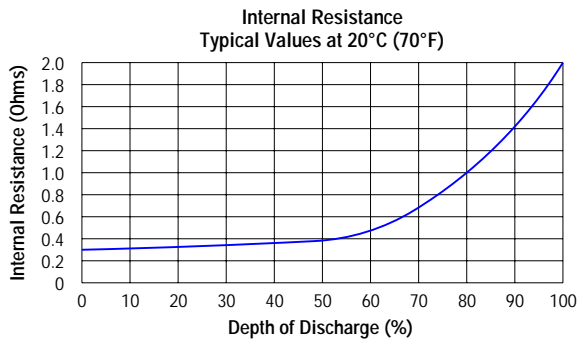

TYPICAL APPLICATIONS

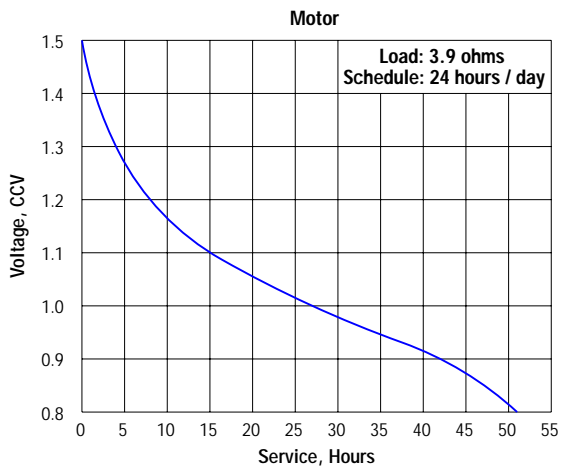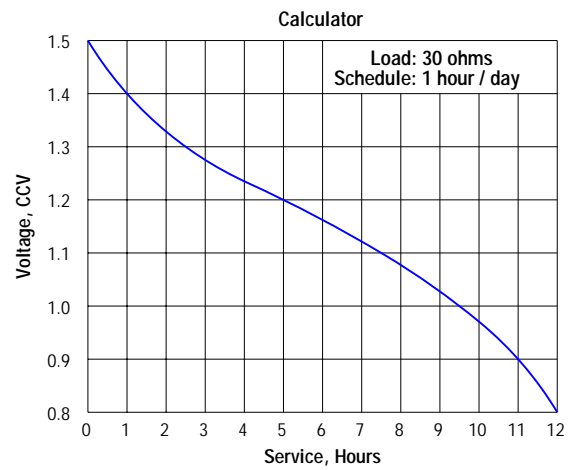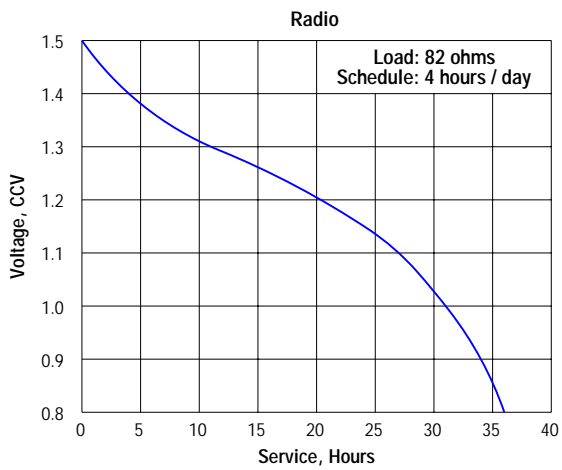

IMPORTANT NOTICE

This data sheet contains information specific to batteries manufactured at time of its publication. Please contact your Energizer representative for most current information. Contents herein do not constitute a warranty.