



Eveready Battery Company, Inc.
 Checkerboard Square
 St. Louis, MO 63164
 Telephone: 1-800-383-7323
 Internet: www.energizer.com


Engineering Data

ENERGIZER NO. 3-350

D

Alkaline 1.5V

No Added Mercury or Cadmium

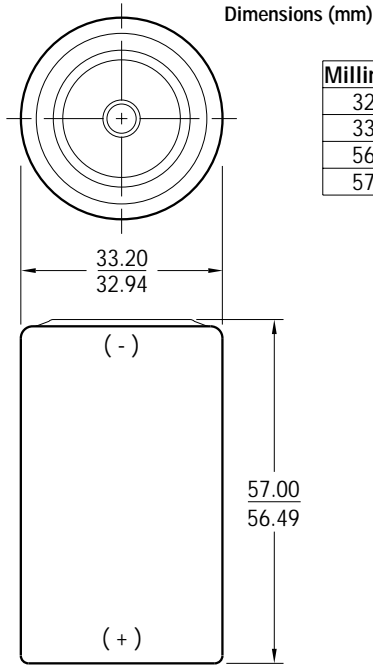

Millimeters	Inches
32.94	1.297
33.20	1.307
56.49	2.224
57.00	2.244

Chemical System: Alkaline-Manganese Dioxide (Zn/MnO₂)

Battery Voltage: 1.5 Volts


Average Weight: 137.8 grams (4.9 oz.)

Volume: 49.3 cubic centimeters (3.0 cubic inch)


Average Service Capacity (to 0.8 Volt / cell): 18 Ah
 (Rated capacity at 25 mA continuous drain)

Jacket: None


TEMPERATURE EFFECTS
 Typical Service to 0.8 volts

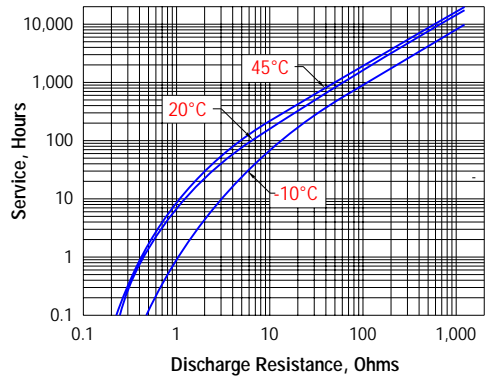

CONSTANT RESISTANCE PERFORMANCE
 Typical Service

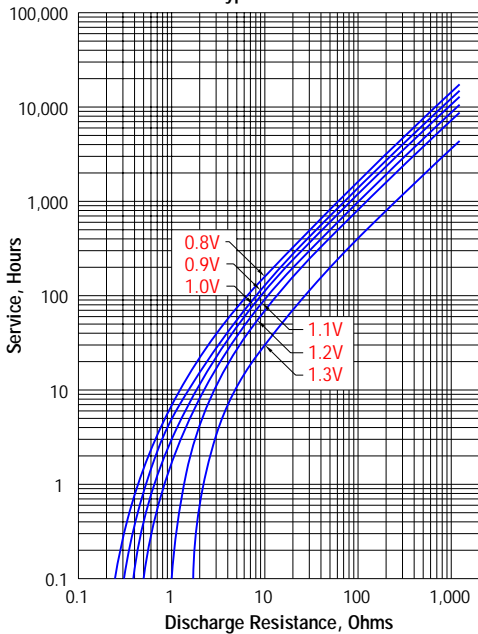


CONSTANT CURRENT PERFORMANCE
 Typical Service





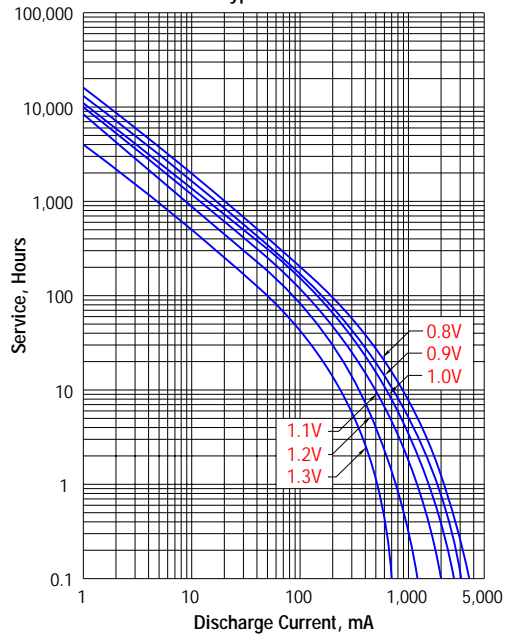


ENERGIZER NO. 3-350

Internal Resistance
Typical Values at 20°C (70°F)

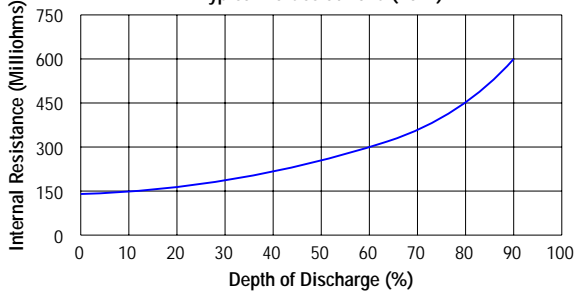

TYPICAL APPLICATIONS

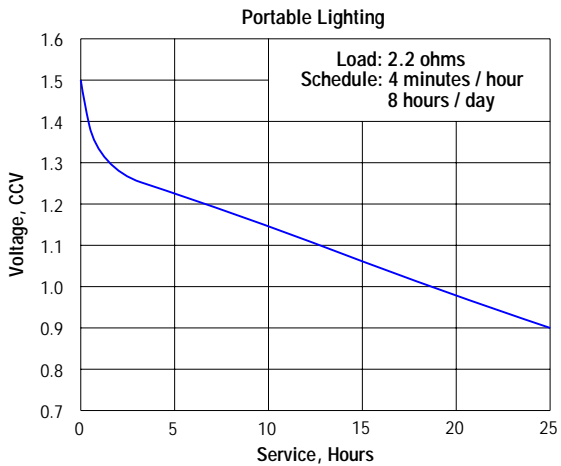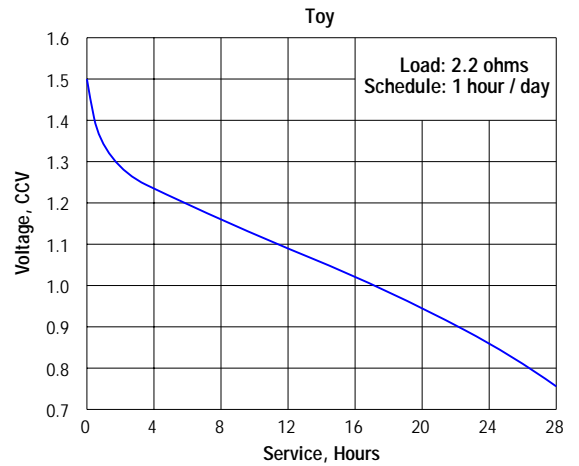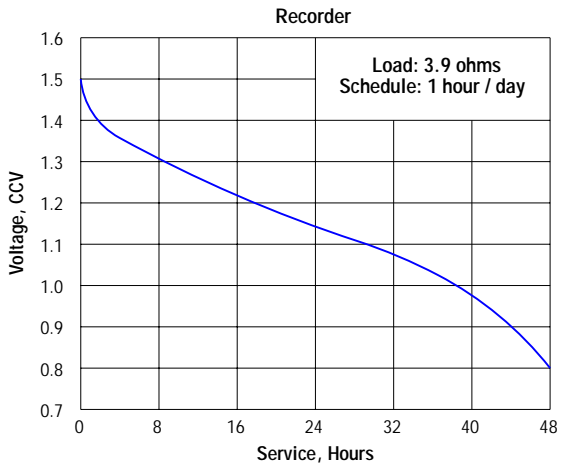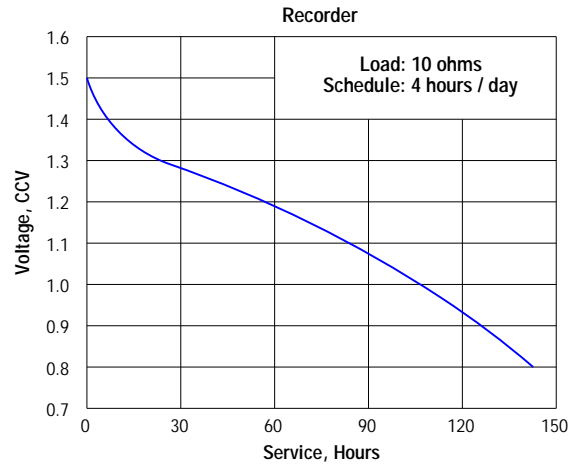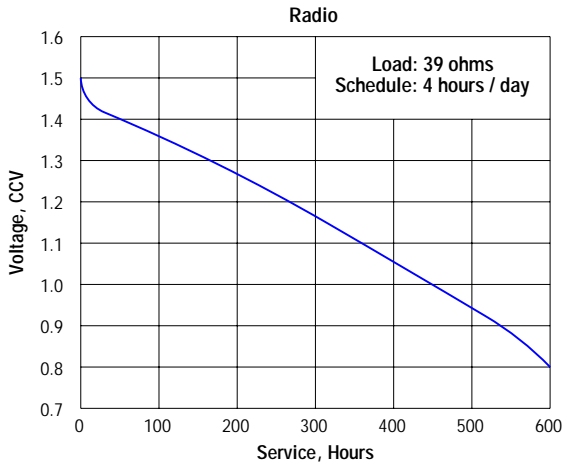

IMPORTANT NOTICE

This data sheet contains information specific to batteries manufactured at time of its publication. Please contact your Energizer representative for most current information. Contents herein do not constitute a warranty.