


## Engineering Data

### EVEREADY NO. 528

*Alkaline 6V*  
*No Added Mercury or Cadmium*

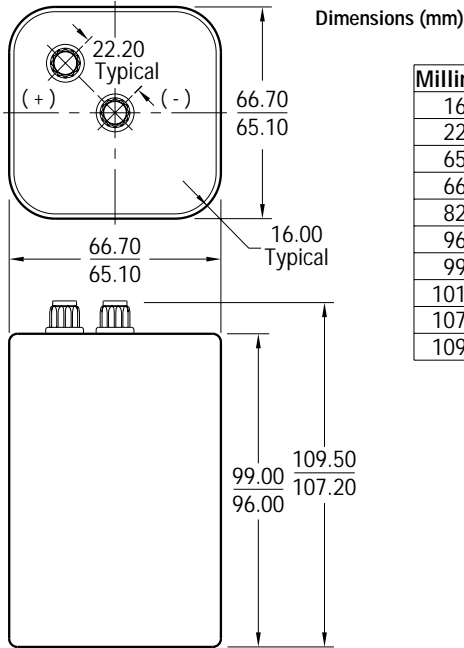

Millimeters	Inches
16.00	.630
22.20	.874
65.10	2.563
66.70	2.626
82.60	3.252
96.00	3.780
99.00	3.898
101.60	4.000
107.20	4.220
109.50	4.311

**Chemical System:** Alkaline-Manganese Dioxide (Zn/MnO<sub>2</sub>)

**Designation:** ANSI / NEDA-915A

**Battery Voltage:** 6 Volts

**Terminal:** Plastic Knurl / Screw Post


**Average Weight:** 885 grams (31.3 oz.)

**Volume:** 434 cubic centimeters (26.5 cubic inch)



**Average Service Capacity ( to 0.8 Volt / cell ):** 26 Ah  
 ( Rated capacity at 25 mA continuous drain )

**Cells:** Four No. 3-361 in series.


**Jacket:** Metal

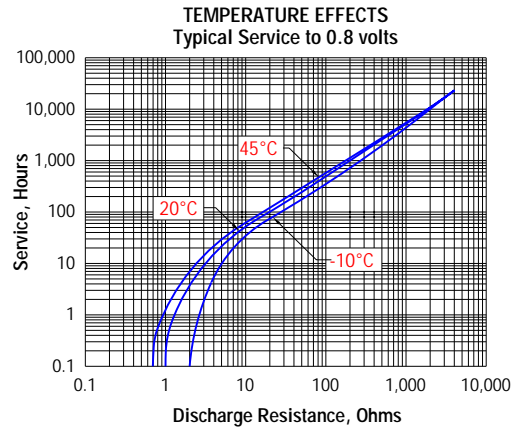







THIS BATTERY SHALL PASS FREELY THROUGH A  
 CYLINDRICAL TUBE 82.6 DIAMETER X 101.6 LONG.

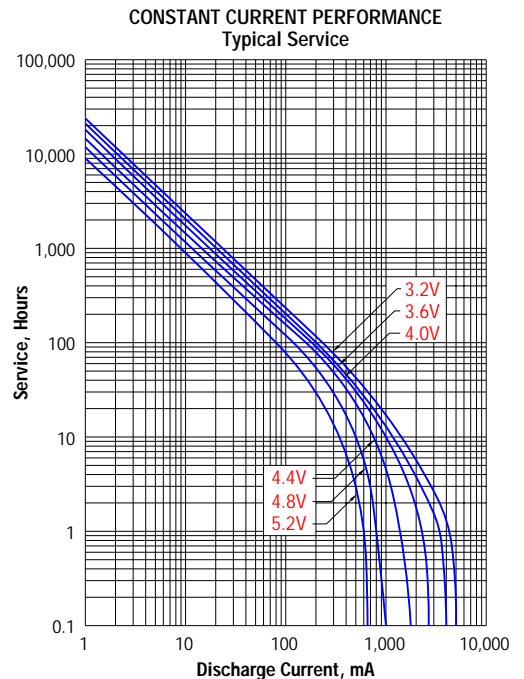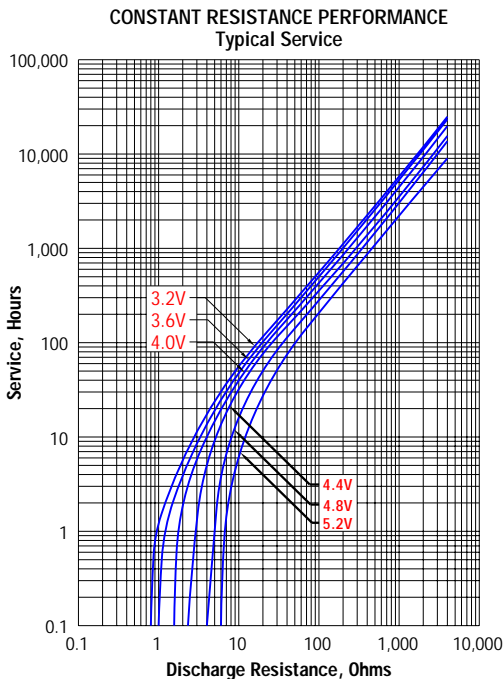

# ENERGIZER NO. 528

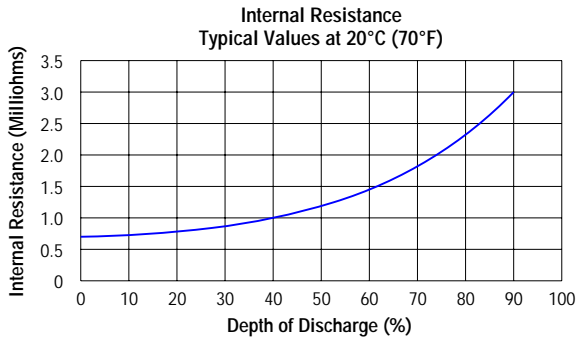

## TYPICAL APPLICATIONS

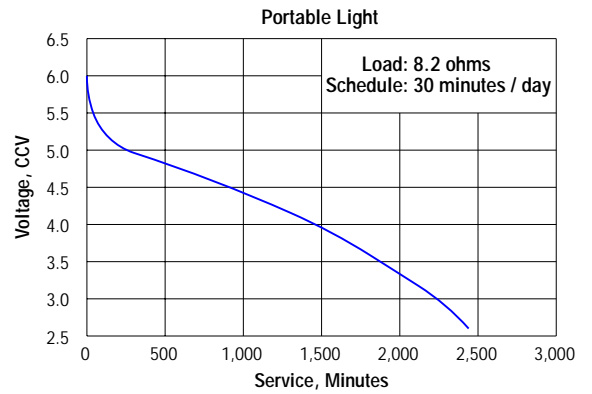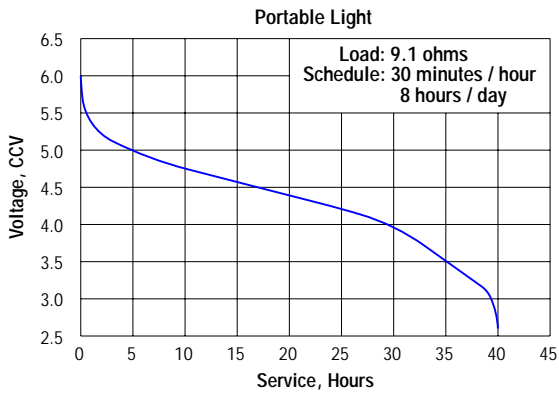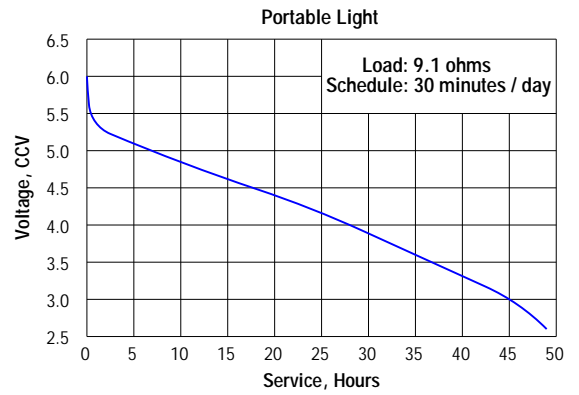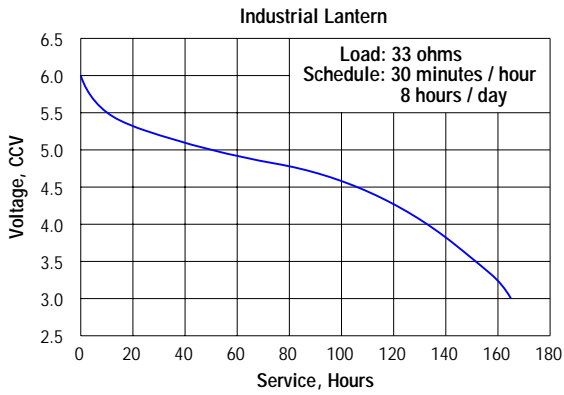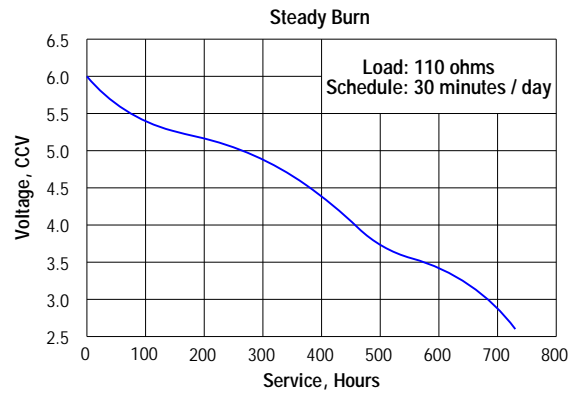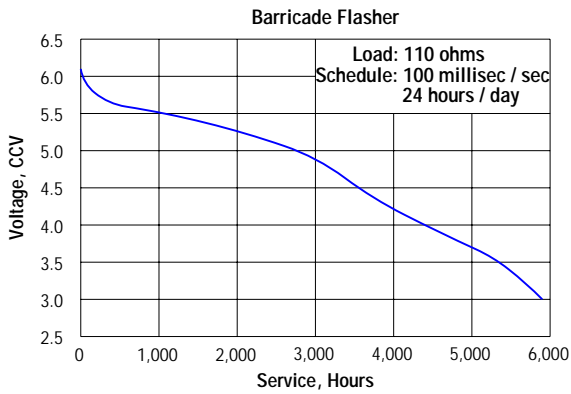

### IMPORTANT NOTICE

This data sheet contains information specific to batteries manufactured at time of its publication. Please contact your Energizer representative for most current information. Contents herein do not constitute a warranty.