



Eveready Battery Company, Inc.  
 Checkerboard Square  
 St. Louis, MO 63164  
 Telephone: 1-800-383-7323  
 Internet: www.energizer.com

## Engineering Data


### ENERGIZER NO. E92

**AAA**

Alkaline 1.5V

No Added Mercury or Cadmium

Dimensions (mm)

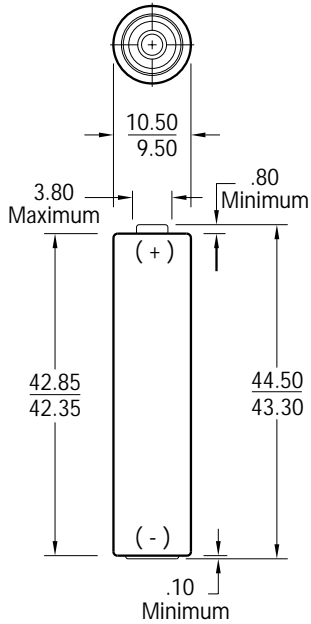

Millimeters	Inches
.10	.004
.80	.031
3.80	.150
9.50	.374
10.50	.413
42.35	1.667
42.85	1.687
43.30	1.705
44.50	1.752

**Chemical System:** Alkaline-Manganese Dioxide (Zn/MnO<sub>2</sub>)

**Designation:** ANSI-24A, IEC-LR03

**Battery Voltage:** 1.5 Volts

**Average Weight:** 11.5 grams (0.4 oz.)


**Volume:** 3.8 cubic centimeters (0.2 cubic inch)

**Average Service Capacity ( to 0.8 Volt / cell ): 1.2 Ah**  
 ( Rated capacity at 25 mA continuous drain )


**Cell:** One No. 3-312 (size "AAA")

**Jacket:** Plastic Label


**TEMPERATURE EFFECTS**  
 Typical Service to 0.8 volts

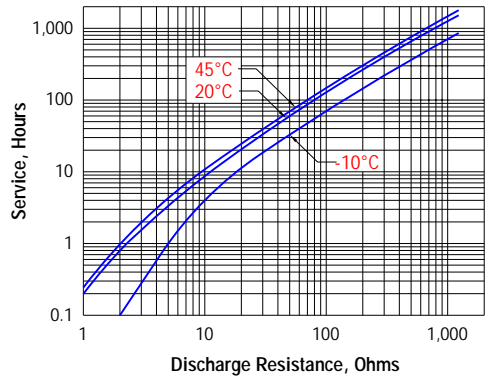


**CONSTANT RESISTANCE PERFORMANCE**  
 Typical Service

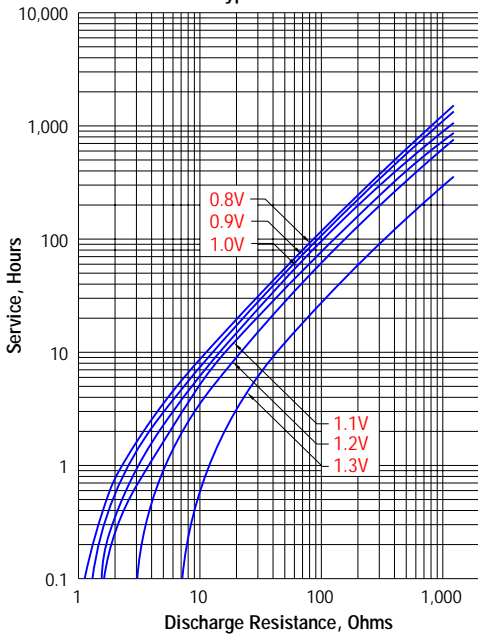





**CONSTANT CURRENT PERFORMANCE**  
 Typical Service

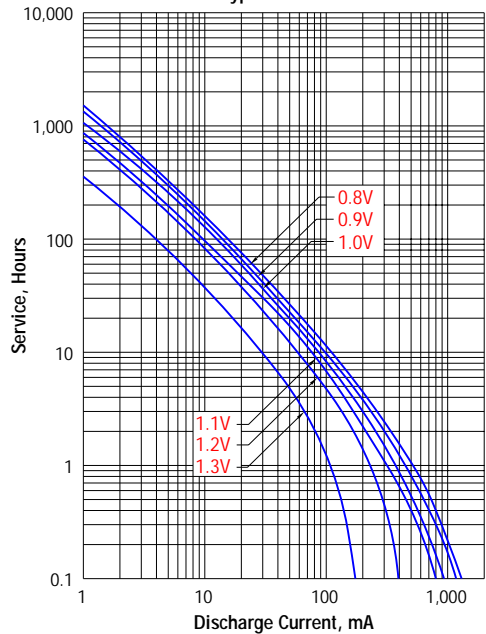

# ENERGIZER NO. E92

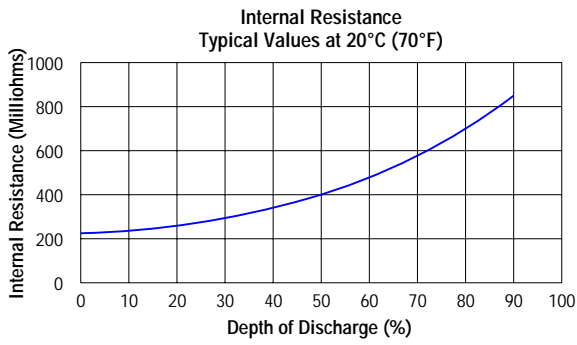

## TYPICAL APPLICATIONS

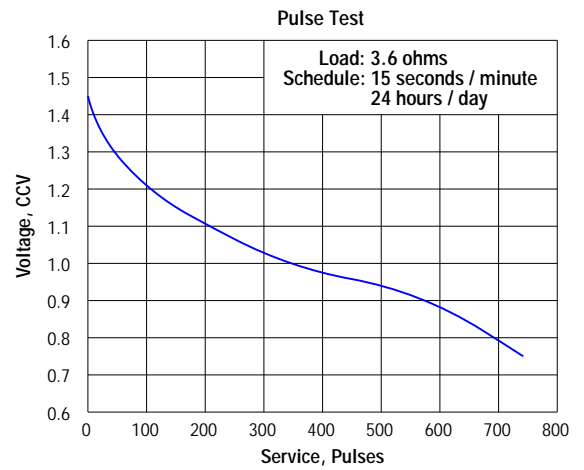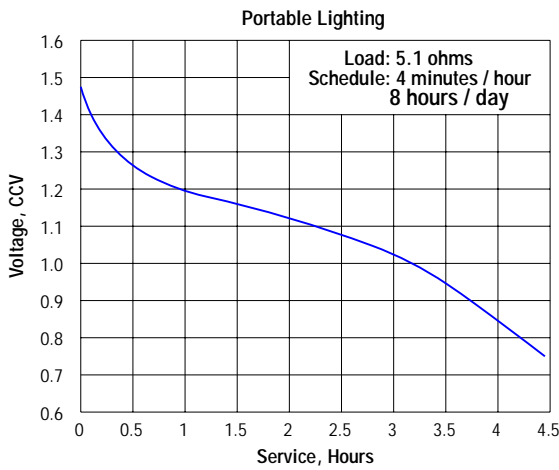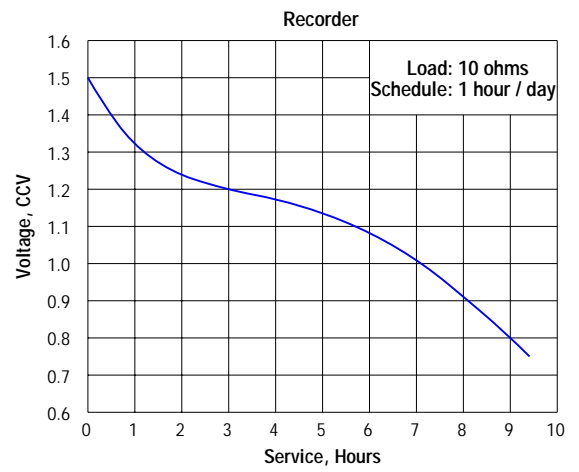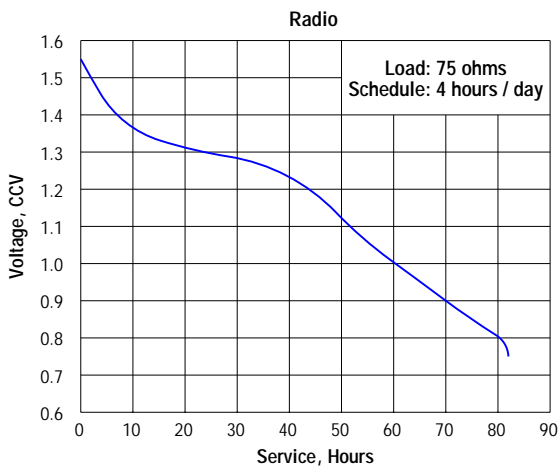

### IMPORTANT NOTICE

This data sheet contains information specific to batteries manufactured at time of its publication. Please contact your Energizer representative for most current information. Contents herein do not constitute a warranty.