



Eveready Battery Company, Inc.
 Checkerboard Square
 St. Louis, MO 63164
 Telephone: 1-800-383-7323
 Internet: www.energizer.com

Engineering Data

EVEREADY NO. EN135A

Alkaline 7.5V

NOT INTENDED FOR RETAIL TRADE

Chemical System: Alkaline-Manganese Dioxide (Zn/MnO₂)

Designation: ANSI / NEDA-1505A, IEC-5LR50


Battery Voltage: 7.5 Volts

Average Weight: 45 grams (1.6 oz.)

Volume: 18.3 cubic centimeters (1.1 cubic inch)

Average Service Capacity (to 4.5 Volt): 650 mAh
 (Rated capacity at 1.1K ohms continuous at 20°C)

Cell: Five No. 1A-P in series.

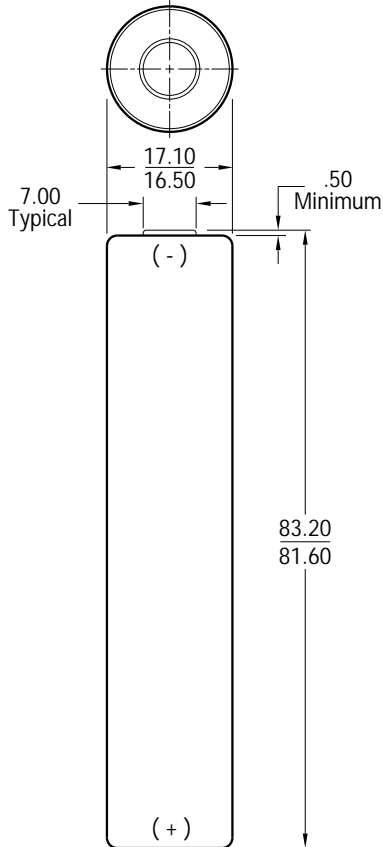


Dimensions (mm)

Millimeters	Inches
.50	.020
7.00	.276
16.50	.650
17.10	.673
81.60	3.213
83.20	3.276

SIMULATED APPLICATION TESTS
 Estimated Average Service at 21°C (70°F)

Schedule	Typical Drains @ 6.25V (milliamperes)	Load (ohms)	CUTOFF VOLTAGE
			4.5V hours
24 hours / day	5.7	1100	114

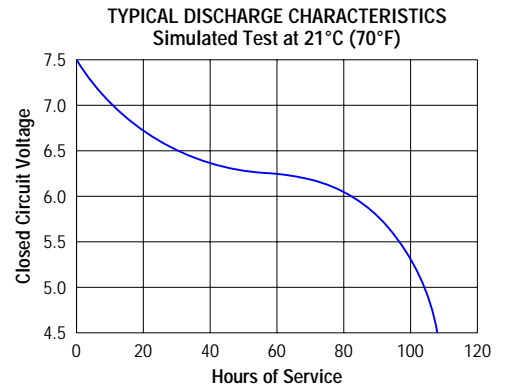

IMPORTANT NOTICE

This data sheet contains information specific to batteries manufactured at time of its publication. Please contact your Energizer representative for most current information. Contents herein do not constitute a warranty.