



Eveready Battery Company, Inc.
 Checkerboard Square
 St. Louis, MO 63164
 Telephone: 1-800-383-7323
 Internet: www.energizer.com

Engineering Data

ENERGIZER NO. 3-312


AAA

Alkaline 1.5V

No Added Mercury or Cadmium

Dimensions (mm)

Millimeters	Inches
10.03	.395
10.29	.405
42.31	1.666
42.82	1.686

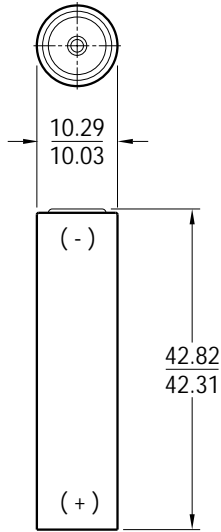

Chemical System: Alkaline-Manganese Dioxide (Zn/MnO₂)

Battery Voltage: 1.5 Volts


Average Weight: 11.5 grams (0.4 oz.)

Volume: 3.6 cubic centimeters (0.2 cubic inch)


Average Service Capacity (to 0.8 Volt / cell): 1.2 Ah
 (Rated capacity at 25 mA continuous drain)

Jacket: None


TEMPERATURE EFFECTS
 Typical Service to 0.8 volts

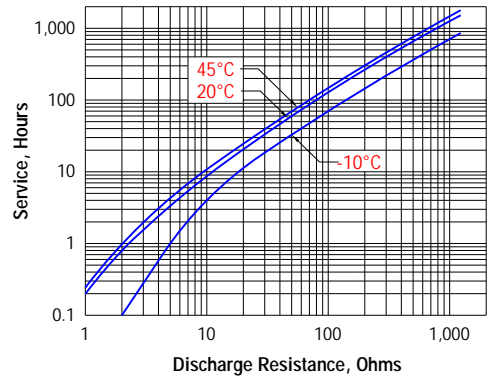


CONSTANT RESISTANCE PERFORMANCE
 Typical Service

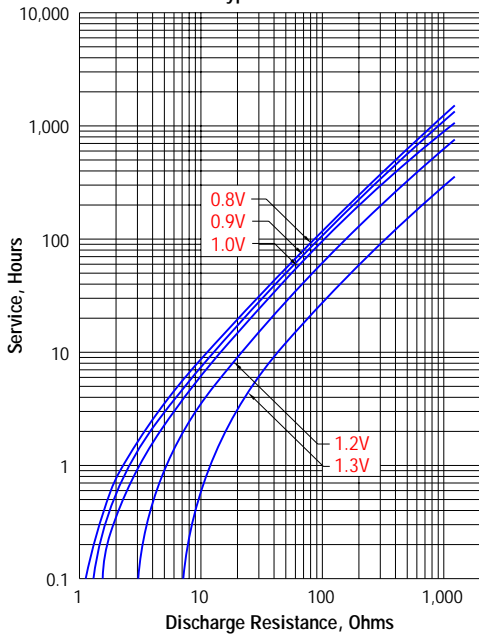





CONSTANT CURRENT PERFORMANCE
 Typical Service

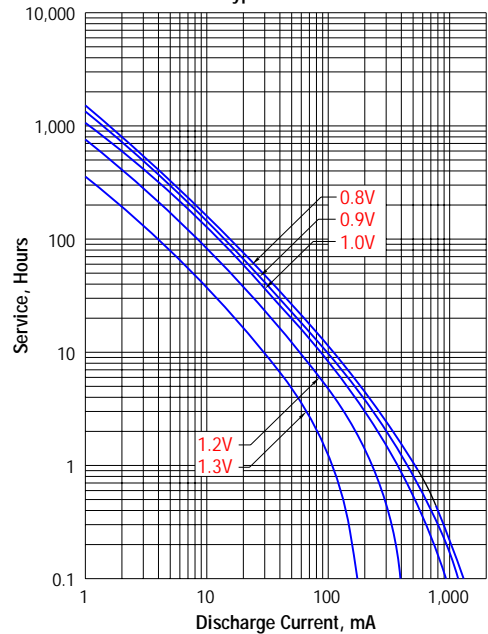

ENERGIZER NO. 3-312

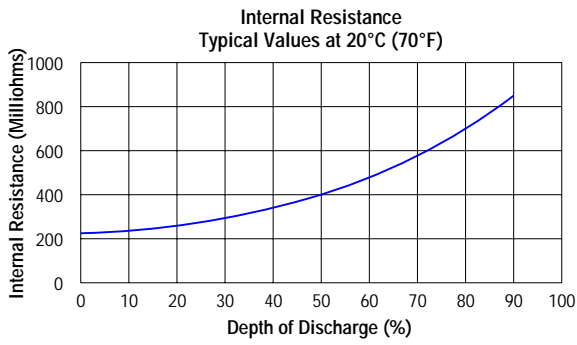

TYPICAL APPLICATIONS

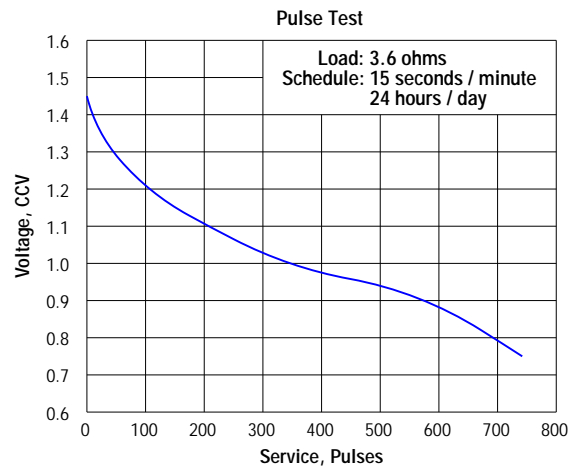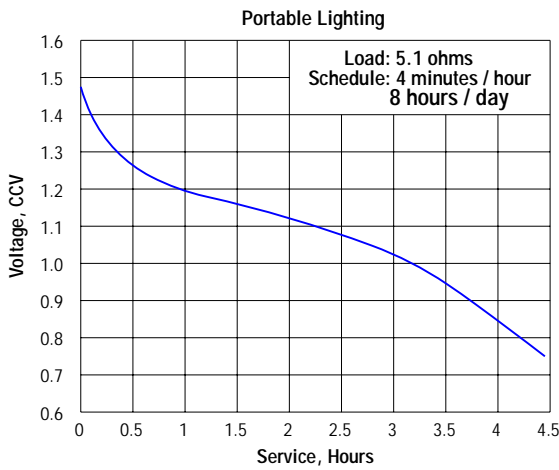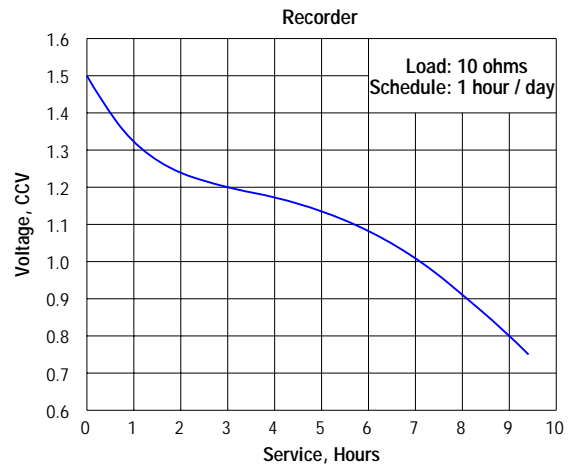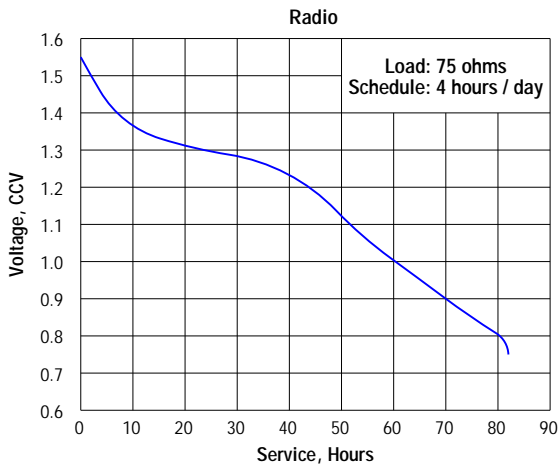

IMPORTANT NOTICE

This data sheet contains information specific to batteries manufactured at time of its publication. Please contact your Energizer representative for most current information. Contents herein do not constitute a warranty.